


KOČIONI OTPORNICI U KERAMIČKOM KUĆIŠTU

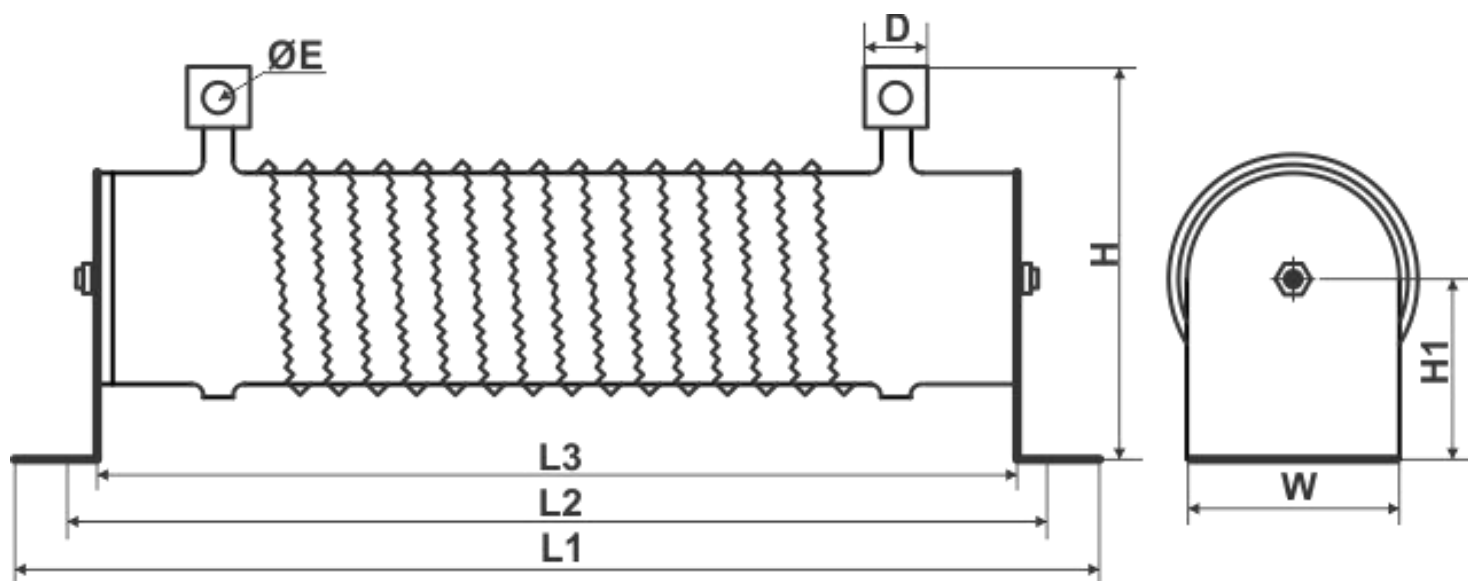

Otpornik		W (mm)	H1 (mm)	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)	D (mm)	ØE (mm)
Snaga	Otpor								
400W	150Ω	40	85	390	360	330	75	10	6
500W	120Ω	50	100	400	365	330	100	10	6
600W	50Ω	50	100	400	365	330	100	10	6
1000W	20Ω	70	70	365	345	300	137	137	6
1000W	40Ω	70	70	365	345	300	137	137	6
1000W	50Ω	70	70	365	345	300	137	12	6
1000W	75Ω	70	70	365	345	300	137	12	6
1000W	80Ω	70	70	365	345	300	137	12	6
1000W	90Ω	70	70	365	345	300	137	12	6
1500W	80Ω	70	70	495	475	430	135	12	6
2000W	10Ω	70	70	495	495	495	135	12	6

2000W	20Ω	70	70	495	495	495	135	12	6
2000W	80Ω	70	70	495	495	495	135	12	6
3000W	50Ω	70	70	495	475	430	135	12	6
6000W	20Ω	100	75	600	570	505	165	15	8